

7`Yub]b[`HYW bc`c[m


Hako
Clean ahead



< U_c!7 Ufdca UhjW' ('

5 `Vka dUWfWUfdYhWYUbb[`a UW]bYZcf`ei]Wž`

H cfc[[\ `WYUbb[`cZga U``UbX`a YX]i a !gjnYX`UFYUg

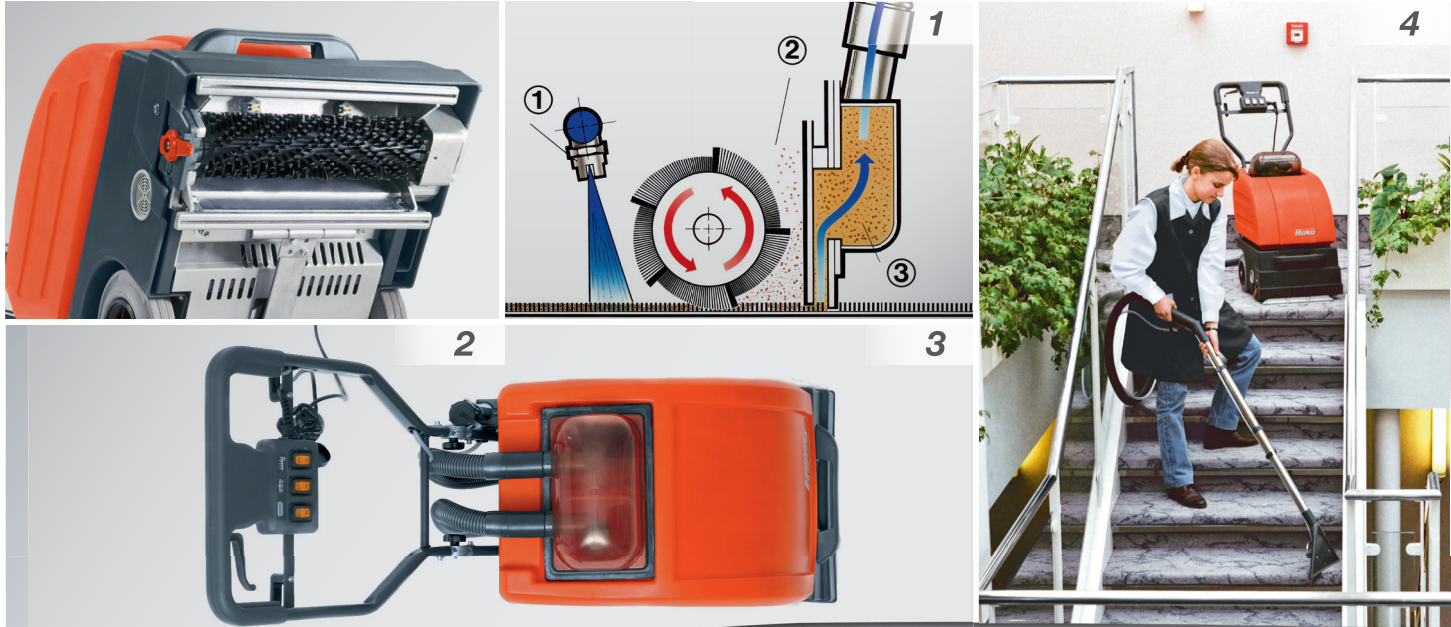

1) Method of operation

1. Sprays on the cleaning solution.
2. Mechanical cleaning of the carpet pile by means of a cylindrical brush.
3. Vacuums the area dry-all in one working operation.

The cylindrical brush system enables the machine to be used on practically all textile flooring. The two powerful suction squeegees ensure only a minimal amount of residual moisture remains on the floor. After just a short drying time, the area cleaned is ready to be walked on again.

2) Operating elements / Handlebar

The handlebar position can be adjusted and also folded for transport purposes. All the operating elements are within direct visible range and immediately accessible. The dosing of the water supply can be adjusted manually.

3) Tank

The diaphragm tank is made of sturdy plastic; the tank volume can be exploited to the full, enabling maximum area coverage with each tank filling.

4) Accessories

Comprehensive range of manual accessories, e.g. for cleaning upholstery, confined spaces or stairs.

Technical Data Hako-Carpomatic 34

| | |
|----------------------------------|------------------------|
| Working width | 33 cm |
| Effective vacuuming width | 37 cm |
| Max. theor. area coverage | 150 m ² / h |
| Power supply, mains | 230 V / 50 Hz |
| Nominal consumption | 1.300 Watt |
| Cable length | 20 m |
| Method of propulsion | Manual |
| Brush speed | 510 U / min |
| Clean water / Waste water tank | 32 / 33 litre |
| Length / Height (with handlebar) | 93 – 107 / 86 – 96 cm |
| Width / Weight | 44 cm / 39 kg |

All rights reserved in respect of modifications related to technical developments and improvements. Illustrations could contain optional equipment.



DIN EN ISO 9001
DIN EN ISO 14001

Hako Machines UK Ltd
01788 825 600
sales@hako.co.uk
Eldon Close, Crick
Northants, NN6 7SL
www.hako.com