
Excellent cleaning performance, with professional spray equipment







Removable and integrated detergent tank for easy transport and easy filling of detergent.

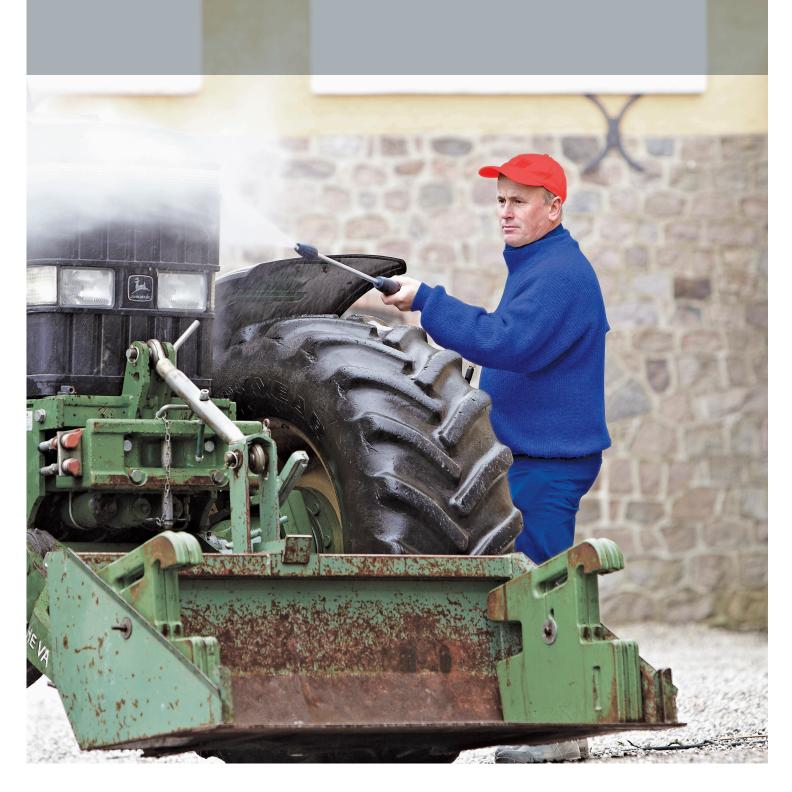

4-in-1- innovative lance and nozzlehead. One lance for most of your cleaning tasks.



Automatic start/stop. Deactivation of the spray gun trigger, the motor stops. This saves energy and elimintes noise during work pauses.



Together with the compact design, the machine takes up less storage space since the size of the aluminium telescopic handle can be reduced during storage.



The ideal machine for everyday cleaning work

The MC 2C range is destined for low intensity use and routine semi-professional cleaning tasks. They offer excellent cleaning performance, professional spray equipment, good storage facilities and handling. The mobile unit associates a high level of ergonomics with cleaning power. Overall, the MC 2C mobile units associates a high level of ergonomics and cleaning power.

The MC 2C comes equipped with versatile and easy to use feautures:

- Automatic start/stop
- Waterflow regulation
- Adjustable handle
- Ergonomic and user friendly, without any compromise with cleaning performance
- Ergo 2000 gun
- Brass cylinder head
- Axial pump

The MC 2C line comprises models designed for routine semi-professional use mainly by trades-men, on small construction sites or for rental.

The compact cold water line that combines high performance level for increased cleaning efficiency, ergonomics and durability for superior everyday cleaning.

- 15 m DN6, steel reinforced HP hose (standard model has a 10 m hose)
- Detergent injector hose and doser
- Removable and integrated detergent tank (2 l)
- Water flow regulation on all models
- FlexoPower Plus Lance with HP nozzle, with improved low pressure spray pattern.
- Hose reel on XT models
- 4-in-1 lance on XT models



Models and specifications

MC 2C

- Ergonomic and compact design.
- Ergo accessory concept for optimal user comfort.
- For low intensity use and routine semi-professional use.
- Axial pump.
- Brass cylinder head.
- Removable integrated detergent tank.
- Steel armed hose.

Additional for MC 2C XT

- 4-in-1 lance.
- 15 m hose.
- · Hose reel.



TECHNICAL SPECIFICATIONS

Description	MC 2C-120/520	MC 2C-120/520 XT	MC 2C-140/610 XT	MC 2C-150/650	MC 2C-150/650 XT
Item no.	128470180	128470136	128470135	128470140	128470138
Pump pressure (bar/MPa)	120/12	120/12	140/14	160/16	160/16
Cleaning impact (kg/force)	2.2	2.2	2.5	2.9	2.9
Water flow Qmax/Qiec (I/h)	520/470	520/470	610/540	600/570	600/570
Max. inlet temperature (°C)	60	60	60	60	60
Pump (RPM)	2800	2800	2800	2800	2800
Dimensions L x W x H (mm)	394 x 391 x 955				
Weight (kg)	27.1	28.1	28.1	26.3	28.1
Power consumption (kW)	2.3	2.3	2.9	3.3	3.3
Voltage/phase/frequency/current (V/~/Hz/A)	230/1/50/10	230/1/50/10	230/1/50/12.6	230/1/50/14.5	230/1/50/14.5
El cable (m)	5	5	5	5	5
Suction height dry / wet (m)	0.5	0.5	0.5	0.5	0.5
Nozzle size	0350	0350	0370	0370	0370
Features:					
Pistons / number of pistons	Stainless stee / 3	Stainless stee / 3	Stainless stee / 3	Ceramic coated / 3	Ceramic coated / 3
Automatic start/stop	•	•	•	•	•
Gun holder	•	•	•	•	•
Cable hook turnable	•	•	•	•	•
FoamSprayer attachment		•	•		•
Detergent bottle 2.5 L		•	•		•
Hose reel			•		•
Standard equipment:					
Gardena male 3/4″	32541	32541	32541	32541	32541
Hose DN6 10m	126528620			126528620	
Hose DN6 15m swivel 3/8 for hose reel		101406176	101406176		101406176
Ergo 2000 Standard w. hose swivel	106403122	106403122	106403122	106403122	106403122
FlexoPower Plus 960 Bend w/o nozzle				106402282	
4-in-1 Lance incl. 0350 aluminum head		106408251			
4-in-1 Lance incl. 0370 aluminum head			106408252		106408252
Tornado Nozzle	101119736			101119737	

Nilfisk Ltd

Nilfisk House · Bowerbank Way · Gilwilly Industrial Estate · Penrith · Cumbria · CA11 9BQ Tel: 01768 868995 (UK) · 01 2943838 (IE) Email: mail.uk@nilfisk.com (UK) · info.ie@nilfisk.com (IE) www.nilfisk.co.uk · www.nilfisk.ie

